

## Delta HLA Plus - Uploading Data From Non-Connected Device(s)

01

All Delta HLA Plus Device(s) feature a dedicated Wi-Fi Access Point.


The dedicated Access Point allows the Delta HLA Plus Device(s) to connect to broadband internet via Wi-Fi or LAN.

The Delta HLA Plus will operate as a standalone High-Level Alarm if it is not connected to Wi-Fi or LAN, but it won't support any linked app functions.



02

When installing on Site. A Dual SIM phone lets you use two SIM cards in one device, providing flexibility in managing data plans, network coverage, and phone numbers. It's especially helpful for managing Delta HLA Plus Device(s) when connecting the Delta HLA Plus to the Access Point for Wi-Fi or LAN connection.

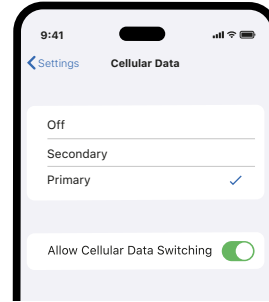

03


A portable wireless modem provides Wi-Fi anywhere on the go. With a SIM card, it creates a high-speed hotspot for laptops, smartphones, and other device(s). It's ideal for Delta HLA Plus Device(s) when broadband internet connection (Wi-Fi or Ethernet) is not available and setting up the Delta HLA Plus to its Access Point.



04


Ensure the Wi-Fi setting on your phone is turned on.

To locate the Delta HLA Plus Access Point using your mobile device, go to your network settings to view and manage networks and nearby hotspots.

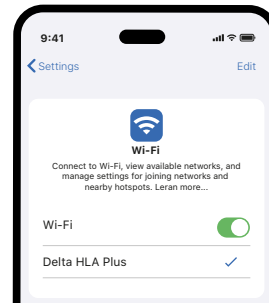

05

To set up the Delta HLA Plus Device on Wi-Fi, Ethernet or LAN for the first time. Begin by positioning yourself near/in front of the Delta HLA Plus Device. During the initial setup, the 'COMMS' button of the Delta HLA Plus device will illuminate red. Press and hold the "COMMS" button for 10 seconds. The "COMMS" button will illuminate flashing green. Using your smartphone or other Wi-Fi enabled device (such as a laptop or tablet), search for the Delta HLA Plus Access Point.

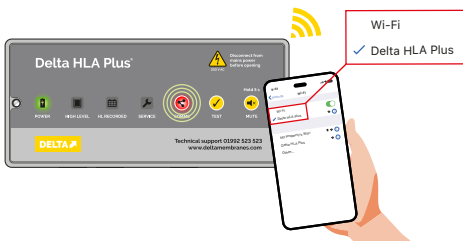

06

Once located, connect your smartphone or other Wi-Fi enabled device to the Wi-Fi Access Point "Delta HLA Plus". After establishing a connection, open Safari, or any web browser and type **192.168.4.1** into the address bar.



Cont...


# Delta Membrane Systems Limited

## Delta HLA Plus - Uploading Data From Non-Connected Device(s)

07

Select your desired Wi-Fi point from the SSID drop-down menu. The signal strength, or RSSI, is displayed alongside the name. Where required enter the password for your chosen Wi-Fi network and click 'Save'. The Delta HLA Plus Device will then reboot and automatically connect to the selected Wi-Fi. The device's 'COMMS' button will illuminate a continuous green light, indicating an active internet connection. If the Delta HLA Plus Device fails to illuminate a continuous green light, please follow these processes again.


The status of the Delta HLA Plus Device is displayed on the Delta Pumps App (once the device has been registered to a user account).

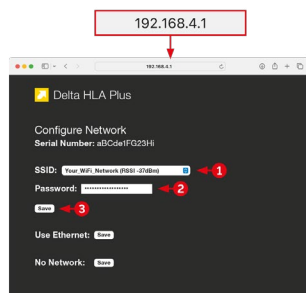

08

For Ethernet/LAN connection, on the Delta HLA Plus Access Point choose "use Ethernet"

Then select the "Save" option. You must remember to select "Save".

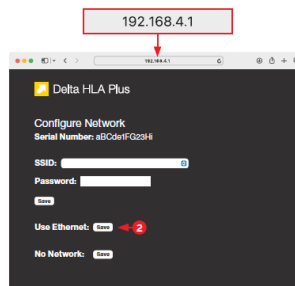

09

Once your Delta HLA Plus Device(s) has established either Wi-Fi and/or Ethernet/LAN connection, we recommend testing the device to ensure floats are correct installed and the device is fully operational.

Check the device's status on the Delta Pumps App to view connection, battery level and upcoming service due dates. Follow manufacturer's guidelines on Commissioning and Servicing of Pumping Station(s) on Site.

